




TDR-X

Contour Rough/Finishing Mower

THE WAY A CONTOUR ROLLER MOWER SHOULD BE DESIGNED!

The **TDR-X** is a new contour roller mower from Progressive, the industry leader with over 30 years of experience designing pull behind rotary mowers. With a 10'6" wide cut, the **TDR-X** is both productive and agile. With 3 independently floating decks, the **TDR-X** will closely follow the contours of championship ranked golf courses, producing a professional quality cut that will impress both Superintendents and Members alike.

- 10'6" Overall cut width
- 3/8" to 3 3/8" Cutting Height Range
- 35 to 45 Recommended PTO H.P.
- 6-way Adaptive Swivel Hitch
- Nine 16 3/4" blades (choice of Pro-Ezll replaceable tip, or one piece fixed blades)
- Over 3,350 blade RPM
- 2" Blade Overlap
- No daily greasing required
- Pro Lift-N-Turn temporary deck lift system

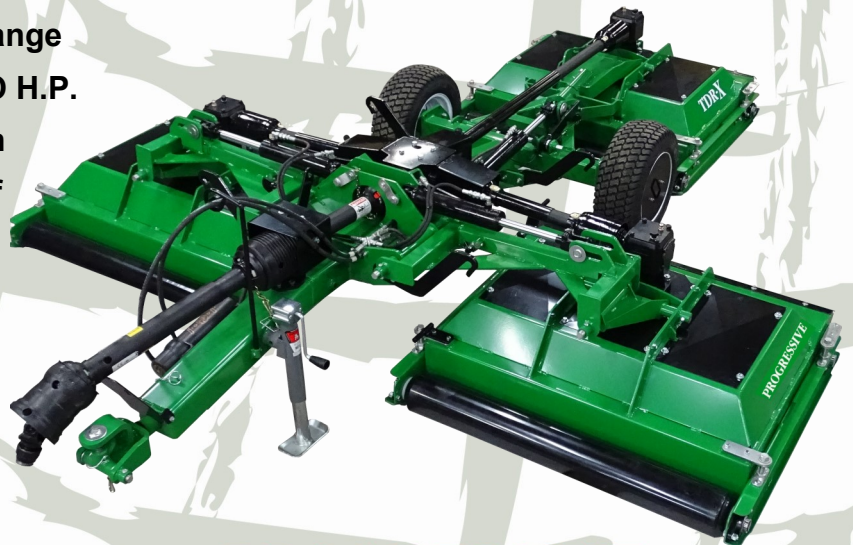

PROGRESSIVE
TURF EQUIPMENT INC.

The Better Built Choice.™



Standard Features



- **6-way Adaptive Swivel Hitch**
 - Isolates the mower from the tractor for truer contour tracking
- **Short length input shaft, with a 80° Constant Velocity Joint**
 - Easy one man connection to the tractor and great mobility
- **100 hr PTO shaft greasing intervals**
 - Does not require removal of the shafts for greasing




- **Narrow front to back 'roller base'**
 - Each independent deck accurately track changing contours
- **Wide transport tire, tread designed to resist grass build up**
 - Steel wheel cover on both rims prevents clipping accumulation
- **2 inch overlap between blades - ensures a more uniform cut**
 - Blades last longer - cut is not affected by leading edge rounding



- **Easy-set one wrench HOC adjustment, cut height range $\frac{3}{8}$ " - $3\frac{3}{8}$ "**
 - Low profile, mounted to top of channel out of harms way
- **Full width, heavy walled 6" diameter rollers**
 - Built with internal support structure - a Progressive exclusive



- **HEX drive roller-end and matching bearing - field proven**
 - Ensure positive engagement and rotation - simple design
- **Outboard bearing placement - 50 hour greasing intervals**
 - Permits a wider deck roller and easier service access

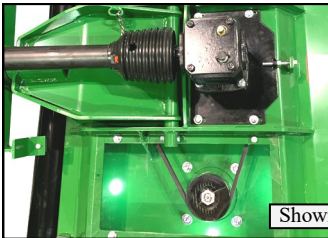

- **Short length drive deck belts, resist stretch and provide longer life**
 - A single part number belt used in all locations - 2 belts per deck
- **Proven single point belt tensioning on each deck**
 - Eliminates concerns with extra idlers and spring tensioners

Shown with cover removed

TDR-X Contour Roller Mower Specifications

Part Number:	549105 Green / 549100 Red	Recommended PTO H.P.:	35 to 45
Mowing Capacity:	4 mph 5.0 acres per hour* 6 mph 7.6 acres per hour*	Cut Height Range:	$\frac{3}{8}$ " to $3\frac{3}{8}$ "
Turning Radius:	Zero turn capability	Cutting Width:	10' 6"
Transport Tires:	23 x 9.5 - 12 Turf	Transport Width:	6' 6"
Operating Weight:	3,250 lb.	Transport Height:	6'
		Transport Length:	11' 6"

*Assumes no overlap or turning

Under our policy of continuous improvement, we reserve the right to change specifications and designs without prior notice. The illustrations shown do not necessarily represent the standard version of product offered by Progressive Turf Equipment Inc.

(800) 668-8873 (519) 527-1080 FAX: (519) 527 2275
www.progressiveturfequip.com info@progressiveturfequip.com